




**Intor, Inc.**  
Designed  
& Manufactured

To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

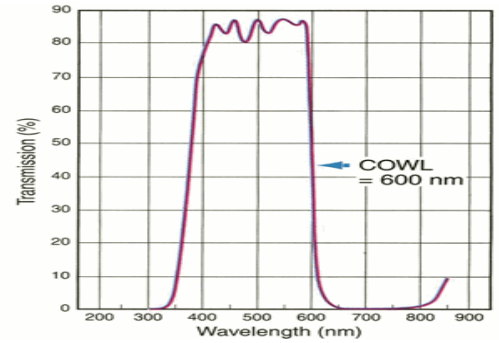

As of: 11/29/2007

Filter Type

Current Price

1 inch Dia-R


1000.0-14-50-	55.80
1010.0-14-50-	55.80
1020.0-14-50-	55.80
1030.0-14-50-	55.80
1040.0-15-50-	55.80
1050.0-14-50-	55.80
1064.0-10-50	55.80
1064.0-10-75-	62.10
1064.0-16-50-	55.80
1070.0-14-50-	62.10
1080.0-14-45-	55.80
1090.0-14-45-	55.80
1100.0-14-45-	57.50
1110.0-14-45-	57.50
1120.0-14-45-	57.50
1140.0-14-45-	57.50
1160.0-11-45-	57.50
1180.0-11-45-	57.50
1190.0-11-45-	57.50
1200.0-11-45-	57.50
1220.0-11-45-	57.50
1240.0-11-45-	57.50
1260.0-11-45-	57.50
1280.0-11-45-	57.50
1300.0-12-45-	57.50
1310.0-32-60-	62.10
1320.0-12-45-	57.50
1340.0-12-45-	57.50
1360.0-12-45-	57.50
1380.0-12-45-	57.50
1400.0-12-40-	59.80
1420.0-12-40-	59.80
1440.0-12-40-	59.80
1460.0-12-40-	59.80
1480.0-12-40-	59.80
1500.0-14-40-	62.10
1520.0-13-40-	62.10
1540.0-13-40-	62.10
1550.0-10-50-	62.10
1550.0-45-60-	62.10
1560.0-13-40-	62.10
1580.0-13-40	62.10
1600.0-13-40-	62.10
1620.0-13-40-	62.10
1640.0-13-40-	62.10
1660.0-13-40-	62.10
1680.0-14-40-	62.10




To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\pm 2.0$  nm. FWHM:  $\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

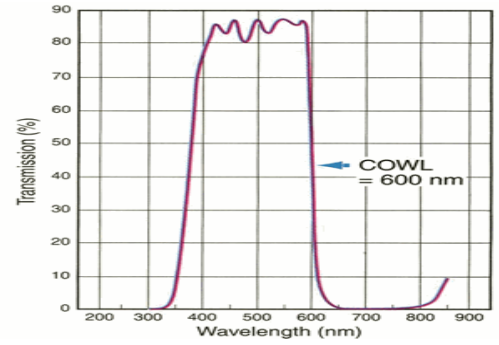

As of: 11/29/2007	Filter Type	Current Price
	1700.0-15-40-	62.10
	1720.0-15-40-	62.10
	1760.0-15-40-	62.10
	1780.0-15-40-	62.10
	1800.0-15-40-	62.10
	1820.0-15-40-	62.10
	1840.0-15-40-	62.10
	1860.0-15-40-	62.10
	1880.0-16-40-	62.10
	1900.0-16-35-	62.10
	1920.0-16-35-	62.10
	1940.0-16-35-	62.10
	1960.0-16-40-	62.10
	1980.0-17-35	62.10
	2000.0-17-35	62.10
	340.0-10-30-	78.20
	365.0-10-30-	78.20
	380.0-10-30-	63.30
	390.0-10-33-	63.30
	394.0-10-33	63.30
	400.0-10-33-	63.30
	400.0-40-45-	66.70
	405.0-10-35-	66.70
	410.0-10-43-	64.40
	415.0-10-43-	64.40
	420.0-10-45-	64.40
	430.0-10-45-	64.40
	435.8-10-45-	64.40
	440.0-10-45-	64.40
	440SWP-	62.10
	450.0-10-45-	64.40
	450.0-40-60-	62.10
	457.9-10-45-	53.50
	460.0-10-45-	53.50
	460.0-30-45-	62.10
	460SWP-	62.10
	467.0-10-45-	53.50
	470.0-10-45-	50.60
	480.0-10-45-	50.60
	480SWP-	62.10
	488.0-10-45-	53.50
	488.0-10-70-	53.50
	488.0-1-30-	135.70
	488.0-3-35-	72.50
	500.0-10-50-	53.50
	500.0-40-70-	62.10
	500.0-70-70-	62.10
	500LWP-	62.10




**Intor, Inc.**  
Designed  
& Manufactured

To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

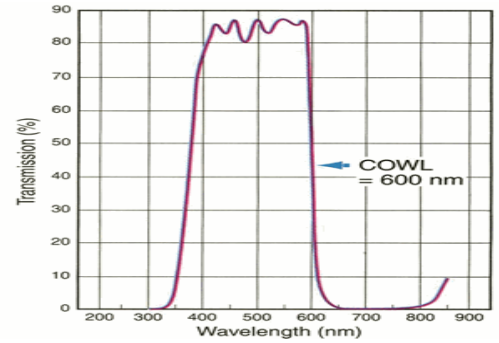

As of: 11/29/2007

Filter Type

Current Price


500SWP-	62.10
505.0-10-50	53.50
510.0-10-50-	53.50
510LWP-	62.10
514.5-10-50-	53.50
514.5-10-70-	62.10
514.5-1-35-	135.70
514.5-3-35-	72.50
520.0-10-50-	53.50
520LWP-	62.10
520SWP-	62.10
525.0-10-50	53.50
525.0-70-70-	62.10
530.0-10-50-	53.50
530LWP-	62.10
532.0-10-50-	53.50
532.0-10-75-	62.10
532.0-1-35-	135.70
532.0-3-35-	72.50
532.0-35-75-	62.10
535.0-50-75-	62.10
540.0-10-50	53.50
540LWP-	62.10
540SWP-	62.10
543.0-10-50-	53.50
546.1-10-50-	53.50
546.1-3-40-	72.50
550.0-10-50-	53.50
550.0-40-75-	62.10
550.0-70-75-	62.10
550LWP-	62.10
560.0-10-50-	53.50
560.0-10-75-	62.10
560LWP-	62.10
560SWP-	62.10
565.0-10-50-	53.50
568.2-10-50-	53.50
568.2-3-40-	72.50
570.0-10-50-	53.50
570.0-40-75-	62.10
570LWP-	62.10
577.7-10-50-	53.50
577.7-3-40-	72.50
580.0-10-50-	53.50
580LWP-	62.10
580SWP-	62.10
589.6-10-50-	53.50
589.6-3-40-	72.50



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

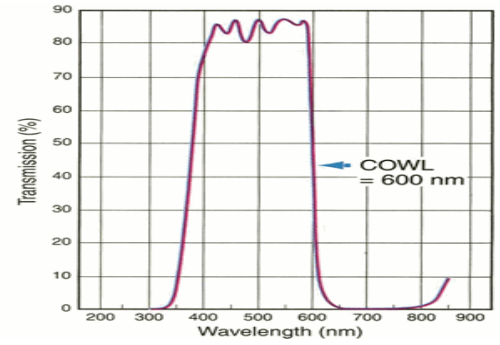

As of: 11/29/2007

Filter Type

Current Price


590.0-10-50-	53.50
590.0-40-75-	62.10
590LWP-	62.10
600.0-10-50-	53.50
600.0-40-75-	62.10
600.0-65-75-	62.10
600LWP-	62.10
600SWP-	62.10
610.0-10-50-	53.50
610LWP-	62.10
620.0-10-50-	53.50
620LWP-	62.10
620SWP-	62.10
630.0-10-50-	53.50
630LWP-	62.10
632.8-10-50-	53.50
632.8-10-75-	62.10
632.8-1-35-	135.70
632.8-30-75	62.10
632.8-3-40-	72.50
632.8-40-75-	62.10
636.0-10-50-	53.50
636.0-10-75-	62.10
640.0-10-50-	53.50
640LWP-	62.10
640SWP-	62.10
647.1-10-50-	53.50
650.0-10-50-	53.50
650.0-10-75	62.10
650.0-40-75-	62.10
650.0-75-75-	62.10
650LWP-	62.10
656.3-10-50-	53.50
660.0-10-50-	50.60
660.0-10-75	62.10
660.0-40-75-	62.10
660LWP-	62.10
660SWP-	62.10
668.0-10-75-	62.10
670.0-10-50-	53.50
670.0-10-75-	62.10
670.0-22-75-	62.10
670.0-30-75-	62.10
670.0-40-75-	62.10
670.0-75-75-	62.10
671.0-10-50-	53.50
675.0-10-75-	62.10
678.0-22-75-	62.10



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

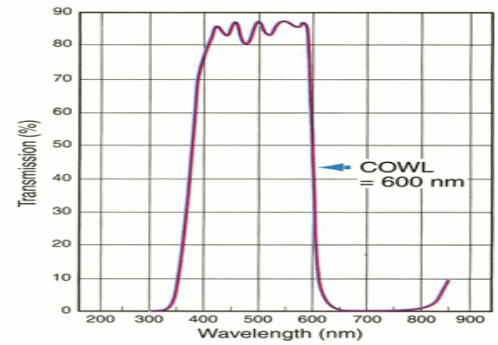

As of: 11/29/2007

Filter Type

Current Price


680.0-10-50-	53.50
680LWP-	62.10
680SWP-	62.10
685.0-10-75-	62.10
690.0-10-50-	53.50
694.3-10-50-	53.50
700.0-10-50-	53.50
700.0-40-75-	62.10
700.0-70-75-	62.10
700LWP-	62.10
700SWP-	62.10
710.0-10-50-	53.50
720.0-10-50-	53.50
720LWP-	62.10
720SWP-	62.10
730.0-10-50-	53.50
730.0-20-75-	62.10
730.0-30-75-	62.10
740.0-10-50-	53.50
740LWP-	62.10
740SWP-	62.10
750.0-10-50-	53.50
750.0-40-75-	62.10
750.0-60-75-	62.10
760.0-10-50-	53.50
760LWP-	62.10
760SWP-	62.10
768.0-10-50	53.50
770.0-10-50-	53.50
775.0-10-75-	62.10
780.0-10-50-	53.50
780.0-10-75-	62.10
780LWP-	62.10
780SWP-	62.10
785.0-10-50-	53.50
785.0-10-75-	62.10
790.0-10-50-	53.50
790.0-60-75-	62.10
800.0-10-50-	53.50
800.0-15-50-	62.10
800.0-35-75-	62.10
800.0-65-75-	62.10
800SWP-	62.10
805.0-10-50-	53.50
805.0-35-75-	62.10
810.0-10-45-	53.50
815.0-10-75-	62.10
820.0-10-45-	53.50



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

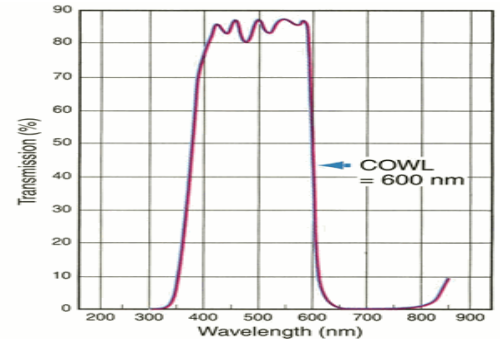

As of: 11/29/2007	Filter Type	Current Price
	820.0-10-75-	62.10
	820.0-40-75-	62.10
	820.0-75-75-	62.10
	820SWP-	62.10
	825.0-10-75-	62.10
	830.0-10-45-	53.50
	830.0-10-75-	62.10
	830.0-40-75-	62.10
	835.0-10-75-	62.10
	840.0-10-45-	53.50
	840SWP-	62.10
	850.0-10-45-	53.50
	850.0-40-75-	62.10
	850.0-70-75-	62.10
	855.0-10-45-	55.80
	860.0-10-45-	55.80
	860SWP-	62.10
	870.0-10-45-	55.80
	875.0-10-75-	62.10
	880.0-10-45-	55.80
	880.0-10-75-	62.10
	880.0-50-75-	62.10
	880.0-70-75-	62.10
	880SWP-	62.10
	885.0-10-75-	62.10
	890.0-10-45-	55.80
	900.0-10-45-	55.80
	900.0-10-75-	62.10
	900.0-20-75-	62.10
	900.0-60-75-	62.10
	900SWP-	62.10
	905.0-10-50-	55.80
	905.0-10-75-	62.10
	905.0-20-75-	62.10
	905.0-50-75-	62.10
	910.0-10-50-	55.80
	910.0-10-75-	62.10
	910.0-20-75-	62.10
	920.0-10-50-	55.80
	930.0-10-50-	55.80
	930.0-10-75-	62.10
	940.0-10-50-	55.80
	940.0-60-75-	62.10
	950.0-10-50-	55.80
	950.0-65-75-	62.10
	960.0-10-50-	55.80
	970.0-10-50-	55.80
	980.0-10-50-	55.80




**Intor, Inc.**  
Designed  
& Manufactured

To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

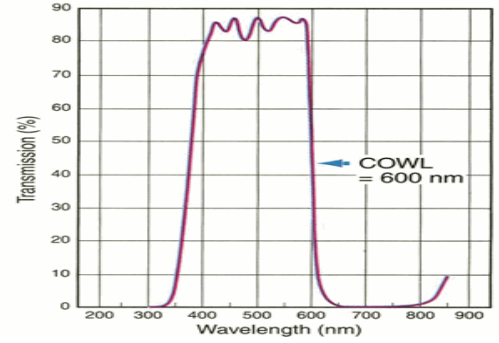

As of: 11/29/2007

Filter Type

Current Price

980.0-10-75	62.10
990.0-10-50-	55.80
990.0-10-75	62.10

1/2 inch Dia-R


1000.0-14-50-	22.40
1010.0-14-50-	22.40
1020.0-14-50-	22.40
1030.0-14-50-	22.40
1040.0-15-50-	22.40
1050.0-14-50-	22.40
1064.0-10-50	22.40
1064.0-10-75-	31.60
1064.0-16-50-	22.40
1070.0-14-50-	31.60
1080.0-14-45-	22.40
1090.0-14-45-	22.40
1100.0-14-45-	24.20
1110.0-14-45-	24.20
1120.0-14-45-	24.20
1140.0-14-45-	24.20
1160.0-11-45-	24.20
1180.0-11-45-	24.20
1190.0-11-45-	24.20
1200.0-11-45-	24.20
1220.0-11-45-	24.20
1240.0-11-45-	24.20
1260.0-11-45-	24.20
1280.0-11-45-	24.20
1300.0-12-45-	24.20
1310.0-32-60-	31.60
1320.0-12-45-	24.20
1340.0-12-45-	24.20
1360.0-12-45-	24.20
1380.0-12-45-	26.50
1400.0-12-40-	26.50
1420.0-12-40-	26.50
1440.0-12-40-	26.50
1460.0-12-40-	26.50
1480.0-12-40-	26.50
1500.0-14-40-	28.80
1520.0-13-40-	28.80
1540.0-13-40-	28.80
1550.0-10-50-	28.80
1550.0-45-60-	31.60
1560.0-13-40-	28.80
1580.0-13-40	28.80
1600.0-13-40-	28.80
1620.0-13-40-	28.80




To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\pm 2.0$  nm. FWHM:  $\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

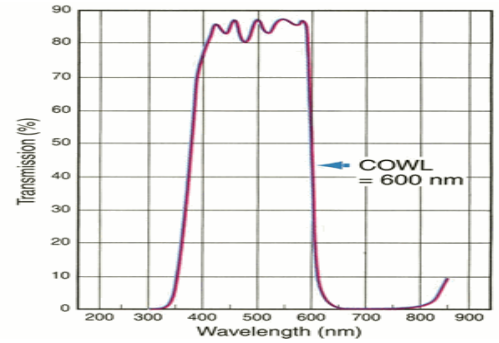

As of: 11/29/2007	Filter Type	Current Price
	1640.0-13-40-	28.80
	1660.0-13-40-	28.80
	1680.0-14-40-	28.80
	1700.0-15-40-	28.80
	1720.0-15-40-	28.80
	1760.0-15-40-	28.80
	1780.0-15-40-	28.80
	1800.0-15-40-	28.80
	1820.0-15-40-	28.80
	1840.0-15-40-	28.80
	1860.0-15-40-	28.80
	1880.0-16-40-	28.80
	1900.0-16-35-	28.80
	1920.0-16-35-	28.80
	1940.0-16-35-	28.80
	1960.0-16-40-	28.80
	1980.0-17-35	28.80
	2000.0-17-35	28.80
	340.0-10-30-	40.35
	365.0-10-30-	35.10
	380.0-10-30-	23.60
	390.0-10-33-	23.60
	394.0-10-33	23.60
	400.0-10-33-	23.60
	400.0-40-45-	28.80
	405.0-10-35-	23.60
	410.0-10-43-	23.60
	415.0-10-43-	23.60
	420.0-10-45-	23.60
	430.0-10-45-	23.60
	435.8-10-45-	23.60
	440.0-10-45-	23.60
	440SWP-	28.80
	450.0-10-45-	23.60
	450.0-40-60-	31.60
	457.9-10-45-	21.60
	460.0-10-45-	21.60
	460.0-30-45-	31.60
	460SWP-	28.80
	467.0-10-45-	21.60
	470.0-10-45-	21.60
	480.0-10-45-	21.60
	480SWP-	28.80
	488.0-10-45-	21.60
	488.0-10-70-	31.60
	488.0-1-30-	60.40
	488.0-3-35-	32.20
	490.0-10-45-	21.60




**Intor, Inc.**  
Designed  
& Manufactured

To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

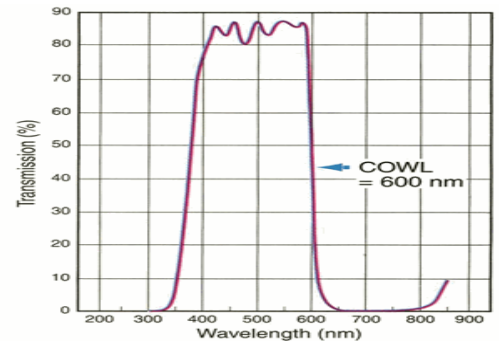

As of: 11/29/2007

Filter Type

Current Price


500.0-10-50-	21.60
500.0-40-70-	31.60
500.0-70-70-	31.60
500LWP-	28.80
500SWP-	28.80
505.0-10-50	21.60
510.0-10-50-	21.60
510LWP-	28.80
514.5-10-50-	21.60
514.5-10-70-	31.60
514.5-1-35-	60.40
514.5-3-35-	32.20
520.0-10-50-	21.60
520LWP-	28.80
520SWP-	28.80
525.0-10-50	21.60
525.0-70-70-	31.60
530.0-10-50-	21.60
530LWP-	28.80
532.0-10-50-	21.60
532.0-10-75-	31.60
532.0-1-35-	60.40
532.0-3-35-	32.20
532.0-35-75-	31.60
535.0-50-75-	31.60
540.0-10-50	21.60
540LWP-	28.80
540SWP-	28.80
543.0-10-50-	21.60
546.1-10-50-	21.60
546.1-3-40-	32.20
550.0-10-50-	21.60
550.0-40-75-	31.60
550.0-70-75-	31.60
550LWP-	28.80
560.0-10-50-	21.60
560.0-10-75-	31.60
560LWP-	28.80
560SWP-	28.80
565.0-10-50-	21.60
568.2-10-50-	21.60
568.2-3-40-	32.20
570.0-10-50-	21.60
570.0-40-75-	31.60
570LWP-	28.80
577.7-10-50-	21.60
577.7-3-40-	32.20
580.0-10-50-	21.60



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

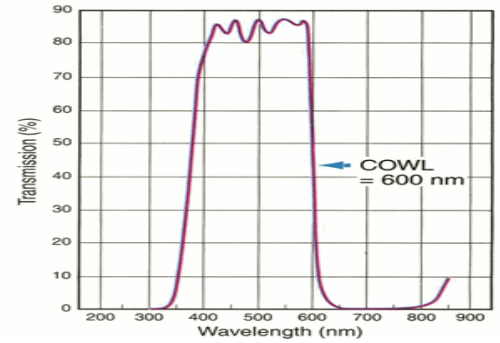


As of: 11/29/2007	Filter Type	Current Price
	580LWP-	28.80
	580SWP-	28.80
	589.6-10-50-	21.60
	589.6-3-40-	32.20
	590.0-10-50-	21.60
	590.0-40-75-	31.60
	590LWP-	28.80
	600.0-10-50-	21.60
	600.0-40-75-	31.60
	600.0-65-75-	31.60
	600LWP-	28.80
	600SWP-	28.80
	610.0-10-50-	21.60
	610LWP-	28.80
	620.0-10-50-	21.60
	620LWP-	28.80
	620SWP-	28.80
	630.0-10-50-	21.60
	630LWP-	28.80
	632.8-10-50-	21.60
	632.8-10-75-	31.60
	632.8-1-35-	60.40
	632.8-30-75	31.60
	632.8-3-40-	32.20
	632.8-40-75-	31.60
	636.0-10-50-	21.60
	636.0-10-75-	31.60
	640.0-10-50-	21.60
	640LWP-	28.80
	640SWP-	28.80
	647.1-10-50-	21.60
	650.0-10-50-	21.60
	650.0-10-75	31.60
	650.0-40-75-	31.60
	650.0-75-75-	31.60
	650LWP-	28.80
	656.3-10-50-	21.60
	660.0-10-50-	21.60
	660.0-10-75	31.60
	660.0-40-75-	31.60
	660LWP-	28.80
	660SWP-	28.80
	668.0-10-75-	31.60
	670.0-10-50-	21.60
	670.0-10-75-	31.60
	670.0-22-75-	31.60
	670.0-30-75-	31.60
	670.0-40-75-	31.60




To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

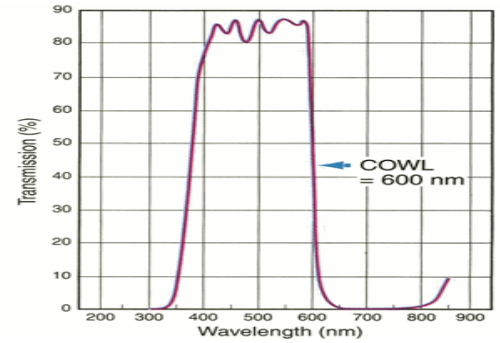

As of: 11/29/2007	Filter Type	Current Price
	670.0-75-75-	31.60
	671.0-10-50-	21.60
	675.0-10-75-	31.60
	678.0-22-75-	31.60
	680.0-10-50-	21.60
	680LWP-	28.80
	680SWP-	28.80
	685.0-10-75-	31.60
	690.0-10-50-	21.60
	694.3-10-50-	21.60
	700.0-10-50-	21.60
	700.0-40-75-	31.60
	700.0-70-75-	31.60
	700LWP-	28.80
	700SWP-	28.80
	710.0-10-50-	21.60
	720.0-10-50-	21.60
	720LWP-	28.80
	720SWP-	28.80
	730.0-10-50-	21.60
	730.0-20-75-	31.60
	730.0-30-75-	31.60
	740.0-10-50-	21.60
	740LWP-	28.80
	740SWP-	28.80
	750.0-10-50-	21.60
	750.0-40-75-	31.60
	750.0-60-75-	31.60
	760.0-10-50-	21.60
	760LWP-	28.80
	760SWP-	28.80
	768.0-10-50	21.60
	770.0-10-50-	21.60
	775.0-10-75-	31.60
	780.0-10-50-	21.60
	780.0-10-75-	31.60
	780LWP-	28.80
	780SWP-	28.80
	785.0-10-50-	21.60
	785.0-10-75-	31.60
	790.0-10-50-	21.60
	790.0-60-75-	31.60
	800.0-10-50-	21.60
	800.0-15-50-	31.60
	800.0-35-75-	31.60
	800.0-65-75-	31.60
	800SWP-	28.80
	805.0-10-50-	21.60




**Intor, Inc.**  
Designed  
& Manufactured

To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

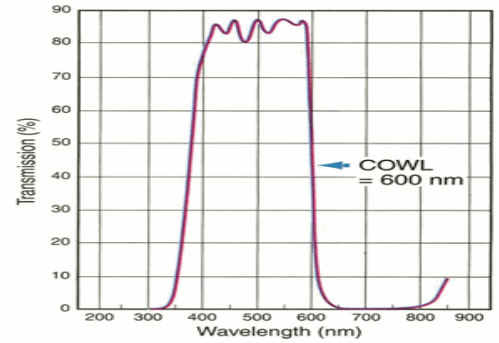

As of: 11/29/2007

Filter Type

Current Price


Filter Type	Current Price
805.0-35-75-	31.60
810.0-10-45-	21.60
815.0-10-75-	31.60
820.0-10-45-	21.60
820.0-10-75-	31.60
820.0-40-75-	31.60
820.0-75-75-	31.60
820SWP-	28.80
825.0-10-75-	31.60
830.0-10-45-	21.60
830.0-10-75-	31.60
830.0-40-75-	31.60
835.0-10-75-	31.60
840.0-10-45-	21.60
840SWP-	28.80
850.0-10-45-	22.40
850.0-40-75-	31.60
850.0-70-75-	31.60
855.0-10-45-	22.40
860.0-10-45-	22.40
860SWP-	28.80
870.0-10-45-	22.40
875.0-10-75-	31.60
880.0-10-45-	22.40
880.0-10-75-	31.60
880.0-50-75-	31.60
880.0-70-75-	31.60
880SWP-	28.80
885.0-10-75-	31.60
890.0-10-45-	22.40
900.0-10-45-	22.40
900.0-10-75-	31.60
900.0-20-75-	31.60
900.0-60-75-	31.60
900SWP-	28.80
905.0-10-50-	22.40
905.0-10-75-	31.60
905.0-20-75-	31.60
905.0-50-75-	31.60
910.0-10-50-	22.40
910.0-10-75-	31.60
910.0-20-75-	31.60
920.0-10-50-	22.40
930.0-10-50-	22.40
930.0-10-75-	31.60
940.0-10-50-	22.40
940.0-60-75-	31.60
950.0-10-50-	22.40



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

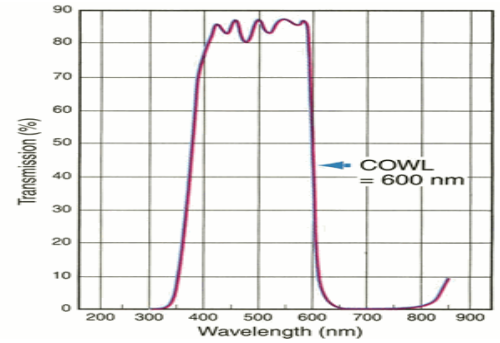

As of: 11/29/2007

Filter Type

Current Price

950.0-65-75-	31.60
960.0-10-50-	22.40
970.0-10-50-	22.40
980.0-10-50-	22.40
980.0-10-75	31.60
990.0-10-50-	22.40
990.0-10-75	31.60

12.5 mm Dia-R


1000.0-14-50-	22.40
1010.0-14-50-	22.40
1020.0-14-50-	22.40
1030.0-14-50-	22.40
1040.0-15-50-	22.40
1050.0-14-50-	22.40
1064.0-10-50	22.40
1064.0-10-75-	31.60
1064.0-16-50-	22.40
1070.0-14-50-	31.60
1080.0-14-45-	22.40
1090.0-14-45-	22.40
1100.0-14-45-	24.20
1110.0-14-45-	24.20
1120.0-14-45-	24.20
1140.0-14-45-	24.20
1160.0-11-45-	24.20
1180.0-11-45-	24.20
1190.0-11-45-	24.20
1200.0-11-45-	24.20
1220.0-11-45-	24.20
1240.0-11-45-	24.20
1260.0-11-45-	24.20
1280.0-11-45-	24.20
1300.0-12-45-	24.20
1310.0-32-60-	31.60
1320.0-12-45-	24.20
1340.0-12-45-	24.20
1360.0-12-45-	24.20
1380.0-12-45-	26.50
1400.0-12-40-	26.50
1420.0-12-40-	26.50
1440.0-12-40-	26.50
1460.0-12-40-	26.50
1480.0-12-40-	26.50
1500.0-14-40-	28.80
1520.0-13-40-	28.80
1540.0-13-40-	28.80
1550.0-10-50-	28.80
1550.0-45-60-	31.60



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

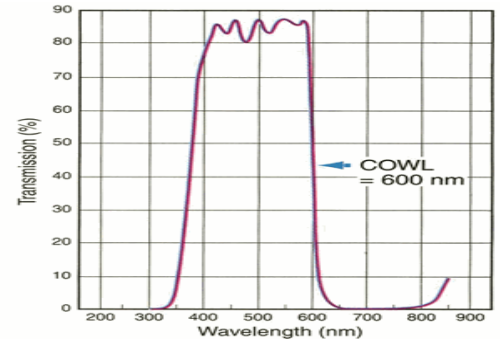


As of: 11/29/2007	Filter Type	Current Price
	1560.0-13-40-	28.80
	1580.0-13-40-	28.80
	1600.0-13-40-	28.80
	1620.0-13-40-	28.80
	1640.0-13-40-	28.80
	1660.0-13-40-	28.80
	1680.0-14-40-	28.80
	1700.0-15-40-	28.80
	1720.0-15-40-	28.80
	1760.0-15-40-	28.80
	1780.0-15-40-	28.80
	1800.0-15-40-	28.80
	1820.0-15-40-	28.80
	1840.0-15-40-	28.80
	1860.0-15-40-	28.80
	1880.0-16-40-	28.80
	1900.0-16-35-	28.80
	1920.0-16-35-	28.80
	1940.0-16-35-	28.80
	1960.0-16-40-	28.80
	1980.0-17-35-	28.80
	2000.0-17-35-	28.80
	340.0-10-30-	40.35
	365.0-10-30-	35.10
	380.0-10-30-	23.60
	390.0-10-33-	23.60
	394.0-10-33-	23.60
	400.0-10-33-	23.60
	400.0-40-45-	28.80
	405.0-10-35-	23.60
	410.0-10-43-	23.60
	415.0-10-43-	23.60
	420.0-10-45-	23.60
	430.0-10-45-	23.60
	435.8-10-45-	23.60
	440.0-10-45-	23.60
	440SWP-	28.80
	450.0-10-45-	23.60
	450.0-40-60-	31.60
	457.9-10-45-	21.60
	460.0-10-45-	21.60
	460.0-30-45-	31.60
	460SWP-	28.80
	467.0-10-45-	21.60
	470.0-10-45-	21.60
	480.0-10-45-	21.60
	480SWP-	28.80
	488.0-10-45-	21.60



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

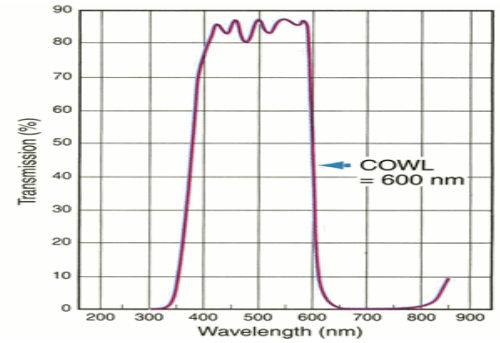


As of: 11/29/2007	Filter Type	Current Price
	488.0-10-70-	21.60
	488.0-1-30-	60.40
	488.0-3-35-	32.20
	500.0-10-50-	21.60
	500.0-40-70-	31.60
	500.0-70-70-	31.60
	500LWP-	28.80
	500SWP-	28.80
	505.0-10-50	21.60
	510.0-10-50-	21.60
	510LWP-	28.80
	514.5-10-50-	21.60
	514.5-10-70-	31.60
	514.5-1-35-	60.40
	514.5-3-35-	32.20
	520.0-10-50-	21.60
	520LWP-	28.80
	520SWP-	28.80
	525.0-10-50	21.60
	525.0-70-70-	31.60
	530.0-10-50-	21.60
	530LWP-	28.80
	532.0-10-50-	21.60
	532.0-10-75-	31.60
	532.0-1-35-	60.40
	532.0-3-35-	32.20
	532.0-35-75-	31.60
	535.0-50-75-	31.60
	540.0-10-50	21.60
	540LWP-	28.80
	540SWP-	28.80
	543.0-10-50-	21.60
	546.1-10-50-	21.60
	546.1-3-40-	32.20
	550.0-10-50-	21.60
	550.0-40-75-	31.60
	550.0-70-75-	31.60
	550LWP-	28.80
	560.0-10-50-	21.60
	560.0-10-75-	31.60
	560LWP-	28.80
	560SWP-	28.80
	565.0-10-50-	21.60
	568.2-10-50-	21.60
	568.2-3-40-	32.20
	570.0-10-50-	21.60
	570.0-40-75-	31.60
	570LWP-	28.80



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

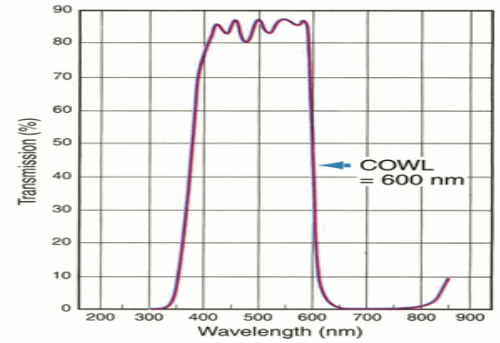


As of: 11/29/2007	Filter Type	Current Price
	577.7-10-50-	21.60
	577.7-3-40-	32.20
	580.0-10-50-	21.60
	580LWP-	28.80
	580SWP-	28.80
	589.6-10-50-	21.60
	589.6-3-40-	32.20
	590.0-10-50-	21.60
	590.0-40-75-	31.60
	590LWP-	28.80
	600.0-10-50-	21.60
	600.0-40-75-	31.60
	600.0-65-75-	31.60
	600LWP-	28.80
	600SWP-	28.80
	610.0-10-50-	21.60
	610LWP-	28.80
	620.0-10-50-	21.60
	620LWP-	28.80
	620SWP-	28.80
	630.0-10-50-	21.60
	630LWP-	28.80
	632.8-10-50-	21.60
	632.8-10-75-	31.60
	632.8-1-35-	60.40
	632.8-30-75	31.60
	632.8-3-40-	32.20
	632.8-40-75-	31.60
	636.0-10-50-	21.60
	636.0-10-75-	31.60
	640.0-10-50-	21.60
	640LWP-	28.80
	640SWP-	28.80
	647.1-10-50-	21.60
	650.0-10-50-	21.60
	650.0-10-75	31.60
	650.0-40-75-	31.60
	650.0-75-75-	31.60
	650LWP-	28.80
	656.3-10-50-	21.60
	660.0-10-50-	21.60
	660.0-10-75	31.60
	660.0-40-75-	31.60
	660LWP-	28.80
	660SWP-	28.80
	668.0-10-75-	31.60
	670.0-10-50-	21.60
	670.0-10-75-	31.60



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

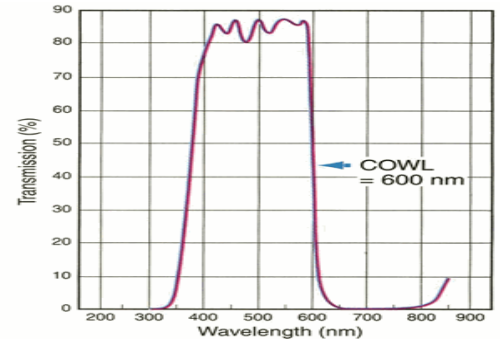

As of: 11/29/2007

Filter Type

Current Price

670.0-22-75-	31.60
670.0-30-75-	31.60
670.0-40-75-	31.60
670.0-75-75-	31.60
671.0-10-50-	21.60
675.0-10-75-	31.60
678.0-22-75-	31.60
680.0-10-50-	21.60
680LWP-	28.80
680SWP-	28.80
685.0-10-75-	31.60
690.0-10-50-	21.60
694.3-10-50-	21.60
700.0-10-50-	21.60
700.0-40-75-	31.60
700.0-70-75-	31.60
700LWP-	28.80
700SWP-	28.80
710.0-10-50-	21.60
720.0-10-50-	21.60
720LWP-	28.80
720SWP-	28.80
730.0-10-50-	21.60
730.0-20-75-	31.60
730.0-30-75-	31.60
740.0-10-50-	21.60
740LWP-	28.80
740SWP-	28.80
750.0-10-50-	21.60
750.0-40-75-	31.60
750.0-60-75-	31.60
760.0-10-50-	21.60
760LWP-	28.80
760SWP-	28.80
768.0-10-50	21.60
770.0-10-50-	21.60
775.0-10-75-	31.60
780.0-10-50-	21.60
780.0-10-75-	31.60
780LWP-	28.80
780SWP-	28.80
785.0-10-50-	21.60
785.0-10-75-	31.60
790.0-10-50-	21.60
790.0-60-75-	31.60
800.0-10-50-	21.60
800.0-15-50-	31.60
800.0-35-75-	31.60




**Intor, Inc.**  
Designed  
& Manufactured

To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

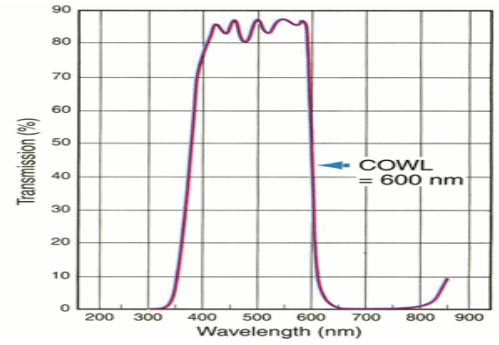

As of: 11/29/2007

Filter Type

Current Price


800.0-65-75-	31.60
800SWP-	28.80
805.0-10-50-	21.60
805.0-35-75-	31.60
810.0-10-45-	21.60
815.0-10-75-	31.60
820.0-10-45-	21.60
820.0-10-75-	31.60
820.0-40-75-	31.60
820.0-75-75-	31.60
820SWP-	28.80
825.0-10-75-	31.60
830.0-10-45-	21.60
830.0-10-75-	31.60
830.0-40-75-	31.60
835.0-10-75-	31.60
840.0-10-45-	21.60
840SWP-	28.80
850.0-10-45-	22.40
850.0-40-75-	31.60
850.0-70-75-	31.60
855.0-10-45-	22.40
860.0-10-45-	22.40
860SWP-	28.80
870.0-10-45-	22.40
875.0-10-75-	31.60
880.0-10-45-	22.40
880.0-10-75-	31.60
880.0-50-75-	31.60
880.0-70-75-	31.60
880SWP-	28.80
885.0-10-75-	31.60
890.0-10-45-	22.40
900.0-10-45-	22.40
900.0-10-75-	31.60
900.0-20-75-	31.60
900.0-60-75-	31.60
900SWP-	28.80
905.0-10-50-	22.40
905.0-10-75-	31.60
905.0-20-75-	31.60
905.0-50-75-	31.60
910.0-10-50-	22.40
910.0-10-75-	31.60
910.0-20-75-	31.60
920.0-10-50-	22.40
930.0-10-50-	22.40
930.0-10-75-	31.60



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

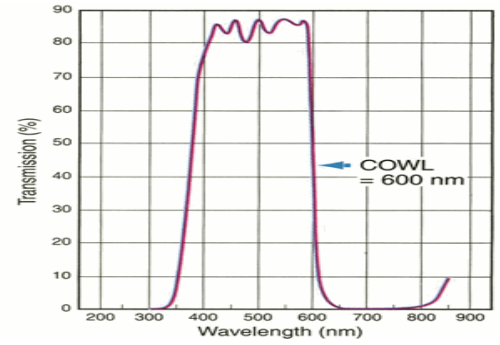

As of: 11/29/2007      Filter Type      Current Price

940.0-10-50-	22.40
940.0-60-75-	31.60
950.0-10-50-	22.40
950.0-65-75-	31.60
960.0-10-50-	22.40
970.0-10-50-	22.40
980.0-10-50-	22.40
980.0-10-75	31.60
990.0-10-50-	22.40
990.0-10-75	31.60

2 inch Dia-R


1000.0-14-50-	202.50
1010.0-14-50-	202.50
1020.0-14-50-	202.50
1030.0-14-50-	202.50
1040.0-15-50-	202.50
1050.0-14-50-	202.50
1064.0-10-50	202.50
1064.0-10-75-	222.50
1064.0-16-50-	202.50
1070.0-14-50-	222.50
1080.0-14-45-	202.50
1090.0-14-45-	202.50
1100.0-14-45-	207.50
1110.0-14-45-	207.50
1120.0-14-45-	207.50
1140.0-14-45-	207.50
1160.0-11-45-	207.50
1180.0-11-45-	207.50
1190.0-11-45-	207.50
1200.0-11-45-	207.50
1220.0-11-45-	207.50
1240.0-11-45-	207.50
1260.0-11-45-	207.50
1280.0-11-45-	207.50
1300.0-12-45-	207.50
1310.0-32-60-	222.50
1320.0-12-45-	207.50
1340.0-12-45-	207.50
1360.0-12-45-	207.50
1380.0-12-45-	207.50
1400.0-12-40-	207.50
1420.0-12-40-	207.50
1440.0-12-40-	207.50
1460.0-12-40-	207.50
1480.0-12-40-	207.50
1500.0-14-40-	212.50
1520.0-13-40-	212.50



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\pm 2.0$  nm. FWHM:  $\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

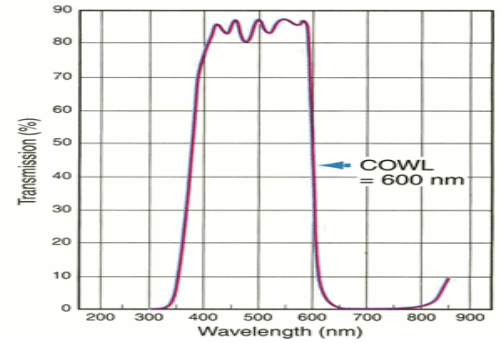

As of: 11/29/2007

Filter Type

Current Price


1540.0-13-40-	212.50
1550.0-10-50-	212.50
1550.0-45-60-	222.50
1560.0-13-40-	212.50
1580.0-13-40	212.50
1600.0-13-40-	212.50
1620.0-13-40-	212.50
1640.0-13-40-	212.50
1660.0-13-40-	212.50
1680.0-14-40-	212.50
1700.0-15-40-	237.50
1720.0-15-40-	237.50
1760.0-15-40-	237.50
1780.0-15-40-	237.50
1800.0-15-40-	237.50
1820.0-15-40-	237.50
1840.0-15-40-	237.50
1860.0-15-40-	237.50
1880.0-16-40-	237.50
1900.0-16-35-	262.50
1920.0-16-35-	262.50
1940.0-16-35-	262.50
1960.0-16-40-	262.50
1980.0-17-35	262.50
2000.0-17-35	262.50
394.0-10-33	222.50
400.0-10-33-	222.50
400.0-40-45-	222.50
405.0-10-35-	222.50
410.0-10-43-	222.50
415.0-10-43-	222.50
420.0-10-45-	222.50
430.0-10-45-	222.50
435.8-10-45-	222.50
440.0-10-45-	222.50
440SWP-	212.50
450.0-10-45-	222.50
450.0-40-60-	222.50
457.9-10-45-	192.50
460.0-10-45-	192.50
460.0-30-45-	222.50
460SWP-	212.50
467.0-10-45-	192.50
470.0-10-45-	192.50
480.0-10-45-	192.50
480SWP-	212.50
488.0-10-45-	192.50
488.0-10-70-	222.50



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

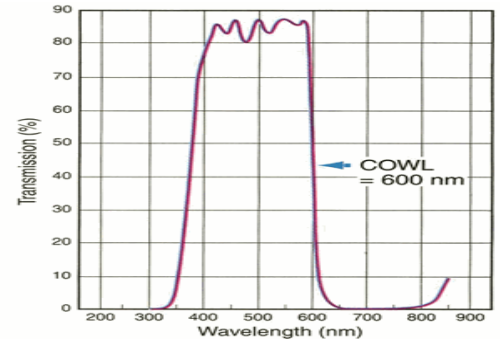


As of: 11/29/2007	Filter Type	Current Price
	488.0-3-35-	262.50
	500.0-10-50-	192.50
	500.0-40-70-	222.50
	500.0-70-70-	222.50
	500LWP-	212.50
	500SWP-	212.50
	505.0-10-50	192.50
	510.0-10-50-	192.50
	510LWP-	212.50
	514.5-10-50-	192.50
	514.5-10-70-	222.50
	514.5-3-35-	262.50
	520.0-10-50-	192.50
	520LWP-	212.50
	520SWP-	212.50
	525.0-10-50	192.50
	525.0-70-70-	222.50
	530.0-10-50-	192.50
	530LWP-	212.50
	532.0-10-50-	192.50
	532.0-10-75-	222.50
	532.0-3-35-	262.50
	532.0-35-75-	222.50
	535.0-50-75-	222.50
	540.0-10-50	192.50
	540LWP-	212.50
	540SWP-	212.50
	543.0-10-50-	192.50
	546.1-10-50-	192.50
	546.1-3-40-	262.50
	550.0-10-50-	192.50
	550.0-40-75-	222.50
	550.0-70-75-	222.50
	550LWP-	212.50
	560.0-10-50-	192.50
	560.0-10-75-	222.50
	560LWP-	212.50
	560SWP-	212.50
	565.0-10-50-	192.50
	568.2-10-50-	192.50
	568.2-3-40-	262.50
	570.0-10-50-	192.50
	570.0-40-75-	222.50
	570LWP-	212.50
	577.7-10-50-	192.50
	577.7-3-40-	262.50
	580.0-10-50-	192.50
	580LWP-	212.50



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

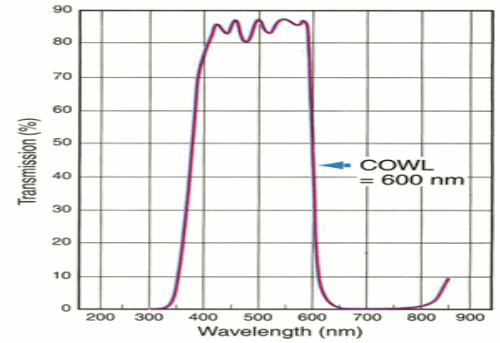


As of: 11/29/2007	Filter Type	Current Price
	580SWP-	212.50
	589.6-10-50-	192.50
	589.6-3-40-	262.50
	590.0-10-50-	192.50
	590.0-40-75-	222.50
	590LWP-	212.50
	600.0-10-50-	192.50
	600.0-40-75-	222.50
	600.0-65-75-	222.50
	600LWP-	212.50
	600SWP-	212.50
	610.0-10-50-	192.50
	610LWP-	212.50
	620.0-10-50-	192.50
	620LWP-	212.50
	620SWP-	212.50
	630.0-10-50-	192.50
	630LWP-	212.50
	632.8-10-50-	192.50
	632.8-10-75-	222.50
	632.8-30-75-	222.50
	632.8-3-40-	262.50
	632.8-40-75-	222.50
	636.0-10-50-	192.50
	636.0-10-75-	122.50
	640.0-10-50-	192.50
	640LWP-	212.50
	640SWP-	212.50
	647.1-10-50-	192.50
	650.0-10-50-	192.50
	650.0-10-75-	222.50
	650.0-40-75-	222.50
	650.0-75-75-	222.50
	650LWP-	212.50
	656.3-10-50-	192.50
	660.0-10-50-	192.50
	660.0-10-75-	222.50
	660.0-40-75-	222.50
	660LWP-	212.50
	660SWP-	212.50
	668.0-10-75-	222.50
	670.0-10-50-	192.50
	670.0-10-75-	222.50
	670.0-22-75-	222.50
	670.0-30-75-	222.50
	670.0-40-75-	222.50
	670.0-75-75-	222.50
	671.0-10-50-	192.50



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

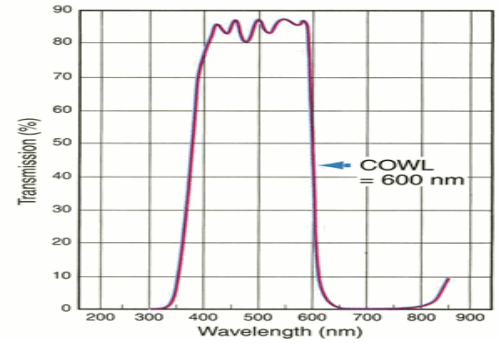


As of: 11/29/2007	Filter Type	Current Price
	675.0-10-75-	222.50
	678.0-22-75-	222.50
	680.0-10-50-	192.50
	680LWP-	237.50
	680SWP-	212.50
	685.0-10-75-	222.50
	690.0-10-50-	192.50
	694.3-10-50-	192.50
	700.0-10-50-	192.50
	700.0-40-75-	222.50
	700.0-70-75-	222.50
	700LWP-	237.50
	700SWP-	212.50
	710.0-10-50-	192.50
	720.0-10-50-	192.50
	720LWP-	237.50
	720SWP-	212.50
	730.0-10-50-	192.50
	730.0-20-75-	222.50
	730.0-30-75-	222.50
	740.0-10-50-	192.50
	740LWP-	237.50
	740SWP-	212.50
	750.0-10-50-	192.50
	750.0-40-75-	222.50
	750.0-60-75-	222.50
	760.0-10-50-	192.50
	760LWP-	237.50
	760SWP-	212.50
	768.0-10-50	192.50
	770.0-10-50-	192.50
	775.0-10-75-	222.50
	780.0-10-50-	192.50
	780.0-10-75-	222.50
	780LWP-	237.50
	780SWP-	237.50
	785.0-10-50-	192.50
	785.0-10-75-	222.50
	790.0-10-50-	192.50
	790.0-60-75-	222.50
	800.0-10-50-	192.50
	800.0-15-50-	222.50
	800.0-35-75-	222.50
	800.0-65-75-	222.50
	800SWP-	237.50
	805.0-10-50-	192.50
	805.0-35-75-	222.50
	810.0-10-45-	192.50



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

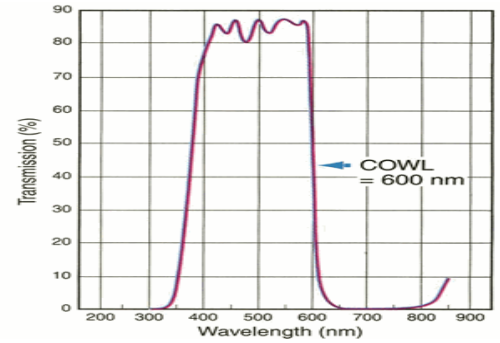


As of: 11/29/2007	Filter Type	Current Price
	815.0-10-75-	222.50
	820.0-10-45-	192.50
	820.0-10-75-	222.50
	820.0-40-75-	222.50
	820.0-75-75-	222.50
	820SWP-	237.50
	825.0-10-75-	222.50
	830.0-10-45-	192.50
	830.0-10-75-	222.50
	830.0-40-75-	222.50
	835.0-10-75-	222.50
	840.0-10-45-	192.50
	840SWP-	237.50
	850.0-10-45-	192.50
	850.0-40-75-	222.50
	850.0-70-75-	222.50
	855.0-10-45-	202.50
	860.0-10-45-	202.50
	860SWP-	237.50
	870.0-10-45-	202.50
	875.0-10-75-	222.50
	880.0-10-45-	202.50
	880.0-10-75-	222.50
	880.0-50-75-	222.50
	880.0-70-75-	222.50
	880SWP-	237.50
	885.0-10-75-	222.50
	890.0-10-45-	202.50
	900.0-10-45-	202.50
	900.0-10-75-	222.50
	900.0-20-75-	222.50
	900.0-60-75-	222.50
	900SWP-	237.50
	905.0-10-50-	202.50
	905.0-10-75-	222.50
	905.0-20-75-	222.50
	905.0-50-75-	222.50
	910.0-10-50-	202.50
	910.0-10-75-	222.50
	910.0-20-75-	222.50
	920.0-10-50-	202.50
	930.0-10-50-	202.50
	930.0-10-75-	222.50
	940.0-10-50-	202.50
	940.0-60-75-	222.50
	950.0-10-50-	202.50
	950.0-65-75-	222.50
	960.0-10-50-	202.50



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

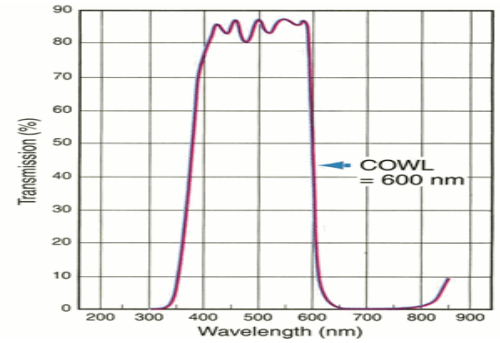

As of: 11/29/2007

Filter Type Current Price

970.0-10-50-	202.50
980.0-10-50-	202.50
980.0-10-75	222.50
990.0-10-50-	202.50
990.0-10-75	222.50

25.0 mm Dia-R


1000.0-14-50-	55.80
1010.0-14-50-	55.80
1020.0-14-50-	55.80
1030.0-14-50-	55.80
1040.0-15-50-	55.80
1050.0-14-50-	55.80
1064.0-10-50	55.80
1064.0-10-75-	62.10
1064.0-16-50-	55.80
1070.0-14-50-	62.10
1080.0-14-45-	55.80
1090.0-14-45-	55.80
1100.0-14-45-	57.50
1110.0-14-45-	57.50
1120.0-14-45-	57.50
1140.0-14-45-	57.50
1160.0-11-45-	57.50
1180.0-11-45-	57.50
1190.0-11-45-	57.50
1200.0-11-45-	57.50
1220.0-11-45-	57.50
1240.0-11-45-	57.50
1260.0-11-45-	57.50
1280.0-11-45-	57.50
1300.0-12-45-	57.50
1310.0-32-60-	62.10
1320.0-12-45-	57.50
1340.0-12-45-	57.50
1360.0-12-45-	57.50
1380.0-12-45-	57.50
1400.0-12-40-	59.80
1420.0-12-40-	59.80
1440.0-12-40-	59.80
1460.0-12-40-	59.80
1480.0-12-40-	59.80
1500.0-14-40-	62.10
1520.0-13-40-	62.10
1540.0-13-40-	62.10
1550.0-10-50-	62.10
1550.0-45-60-	62.10
1560.0-13-40-	62.10
1580.0-13-40	62.10



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

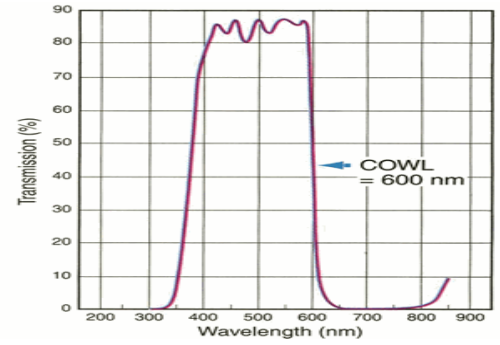

As of: 11/29/2007

Filter Type

Current Price


1600.0-13-40-	62.10
1620.0-13-40-	62.10
1640.0-13-40-	62.10
1660.0-13-40-	62.10
1680.0-14-40-	62.10
1700.0-15-40-	62.10
1720.0-15-40-	62.10
1760.0-15-40-	62.10
1780.0-15-40-	62.10
1800.0-15-40-	62.10
1820.0-15-40-	62.10
1840.0-15-40-	62.10
1860.0-15-40-	62.10
1880.0-16-40-	62.10
1900.0-16-35-	62.10
1920.0-16-35-	62.10
1940.0-16-35-	62.10
1960.0-16-40-	62.10
1980.0-17-35	62.10
2000.0-17-35	62.10
340.0-10-30-	78.20
365.0-10-30-	78.20
380.0-10-30-	63.30
390.0-10-33-	63.30
394.0-10-33	63.30
400.0-10-33-	63.30
400.0-40-45-	66.70
405.0-10-35-	66.70
410.0-10-43-	64.40
415.0-10-43-	64.40
420.0-10-45-	64.40
430.0-10-45-	64.40
435.8-10-45-	64.40
440SWP-	62.10
450.0-10-45-	64.40
450.0-40-60-	62.10
457.9-10-45-	53.50
460.0-10-45-	53.50
460.0-30-45-	62.10
460SWP-	62.10
467.0-10-45-	53.50
470.0-10-45-	53.50
480.0-10-45-	53.50
480SWP-	62.10
488.0-10-45-	53.50
488.0-10-70-	53.50
488.0-1-30-	135.70
488.0-3-35-	72.50



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

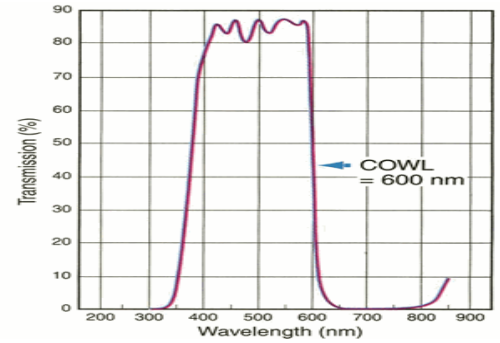

As of: 11/29/2007

Filter Type

Current Price

500.0-10-50-	53.50
500.0-40-70-	62.10
500.0-70-70-	62.10
500LWP-	62.10
500SWP-	62.10
505.0-10-50	53.50
510.0-10-50-	53.50
510LWP-	62.10
514.5-10-50-	53.50
514.5-10-70-	62.10
514.5-1-35-	135.70
514.5-3-35-	72.50
520.0-10-50-	53.50
520LWP-	62.10
520SWP-	62.10
525.0-10-50	53.50
525.0-70-70-	62.10
530.0-10-50-	53.50
530LWP-	62.10
532.0-10-50-	53.50
532.0-10-75-	62.10
532.0-1-35-	135.70
532.0-3-35-	72.50
532.0-35-75-	62.10
535.0-50-75-	62.10
540.0-10-50	53.50
540LWP-	62.10
540SWP-	62.10
543.0-10-50-	53.50
546.1-10-50-	53.50
546.1-3-40-	72.50
550.0-10-50-	53.50
550.0-40-75-	62.10
550.0-70-75-	62.10
550LWP-	62.10
560.0-10-50-	53.50
560.0-10-75-	62.10
560LWP-	62.10
560SWP-	62.10
565.0-10-50-	53.50
568.2-10-50-	53.50
568.2-3-40-	72.50
570.0-10-50-	53.50
570.0-40-75-	62.10
570LWP-	62.10
577.7-10-50-	53.50
577.7-3-40-	72.50
580.0-10-50-	53.50




**Intor, Inc.**  
Designed  
& Manufactured

To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. ( $10^{-4}$  T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

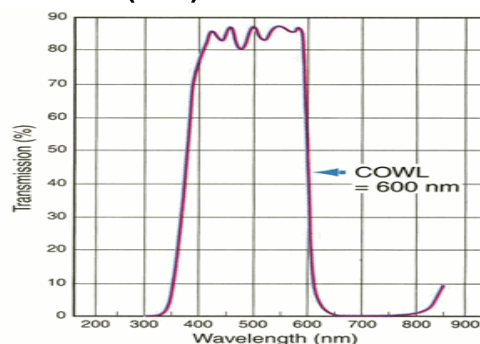

As of: 11/29/2007

Filter Type

Current Price


Filter Type	Current Price
580LWP-	62.10
580SWP-	62.10
589.6-10-50-	53.50
589.6-3-40-	72.50
590.0-10-50-	53.50
590.0-40-75-	62.10
590LWP-	62.10
600.0-10-50-	53.50
600.0-40-75-	62.10
600.0-65-75-	62.10
600LWP-	62.10
600SWP-	62.10
610.0-10-50-	53.50
610LWP-	62.10
620.0-10-50-	53.50
620LWP-	62.10
620SWP-	62.10
630.0-10-50-	53.50
630LWP-	62.10
632.8-10-50-	53.50
632.8-10-75-	62.10
632.8-1-35-	135.70
632.8-30-75	62.10
632.8-3-40-	72.50
632.8-40-75-	62.10
636.0-10-50-	53.50
636.0-10-75-	62.10
640.0-10-50-	53.50
640LWP-	62.10
640SWP-	62.10
647.1-10-50-	53.50
650.0-10-50-	53.50
650.0-10-75	62.10
650.0-40-75-	62.10
650.0-75-75-	62.10
650LWP-	62.10
656.3-10-50-	53.50
660.0-10-50-	53.50
660.0-10-75	62.10
660.0-40-75-	62.10
660LWP-	62.10
660SWP-	62.10
668.0-10-75-	62.10
670.0-10-50-	53.50
670.0-10-75-	62.10
670.0-22-75-	62.10
670.0-30-75-	62.10
670.0-40-75-	62.10



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

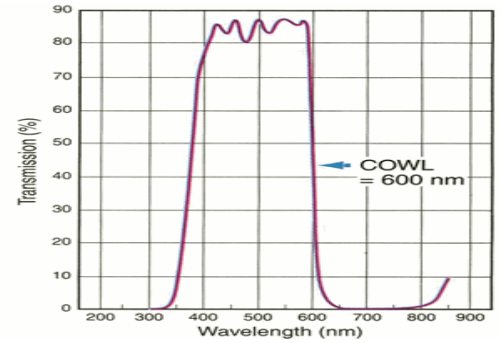


As of: 11/29/2007	Filter Type	Current Price
	670.0-75-75-	62.10
	671.0-10-50-	53.50
	675.0-10-75-	62.10
	678.0-22-75-	62.10
	680.0-10-50-	53.50
	680LWP-	62.10
	680SWP-	62.10
	685.0-10-75-	62.10
	690.0-10-50-	53.50
	694.3-10-50-	53.50
	700.0-10-50-	53.50
	700.0-40-75-	62.10
	700.0-70-75-	62.10
	700LWP-	62.10
	700SWP-	62.10
	710.0-10-50-	53.50
	720.0-10-50-	53.50
	720LWP-	62.10
	720SWP-	62.10
	730.0-10-50-	53.50
	730.0-20-75-	62.10
	730.0-30-75-	62.10
	740.0-10-50-	53.50
	740LWP-	62.10
	740SWP-	62.10
	750.0-10-50-	53.50
	750.0-40-75-	62.10
	750.0-60-75-	62.10
	760.0-10-50-	53.50
	760LWP-	62.10
	760SWP-	62.10
	768.0-10-50	53.50
	770.0-10-50-	53.50
	775.0-10-75-	62.10
	780.0-10-50-	53.50
	780LWP-	62.10
	780SWP-	62.10
	785.0-10-50-	53.50
	790.0-10-50-	53.50
	790.0-60-75-	62.10
	800.0-10-50-	53.50
	800.0-15-50-	62.10
	800.0-35-75-	62.10
	800.0-65-75-	62.10
	800SWP-	62.10
	805.0-10-50-	53.50
	805.0-35-75-	62.10
	810.0-10-45-	53.50




To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

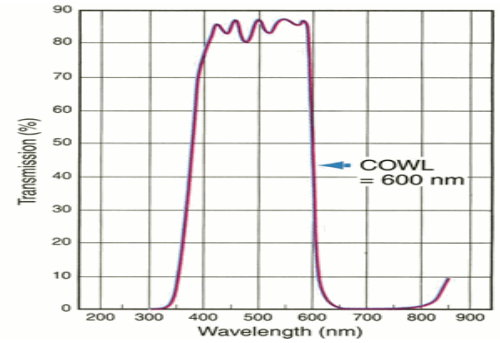

As of: 11/29/2007	Filter Type	Current Price
	815.0-10-75-	62.10
	820.0-10-45-	53.50
	820.0-10-75-	62.10
	820.0-40-75-	62.10
	820.0-75-75-	62.10
	820SWP-	62.10
	825.0-10-75-	62.10
	830.0-10-45-	53.50
	830.0-10-75-	62.10
	830.0-40-75-	62.10
	835.0-10-75-	62.10
	840.0-10-45-	53.50
	840SWP-	62.10
	850.0-10-45-	53.50
	850.0-40-75-	62.10
	850.0-70-75-	62.10
	855.0-10-45-	55.80
	860.0-10-45-	55.80
	860SWP-	62.10
	870.0-10-45-	55.80
	875.0-10-75-	62.10
	880.0-10-45-	55.80
	880.0-10-75-	62.10
	880.0-50-75-	62.10
	880.0-70-75-	62.10
	880SWP-	62.10
	885.0-10-75-	62.10
	890.0-10-45-	55.80
	900.0-10-45-	55.80
	900.0-10-75-	62.10
	900.0-20-75-	62.10
	900.0-60-75-	62.10
	900SWP-	62.10
	905.0-10-50-	55.80
	905.0-10-75-	62.10
	905.0-20-75-	62.10
	905.0-50-75-	62.10
	910.0-10-50-	55.80
	910.0-10-75-	62.10
	910.0-20-75-	62.10
	920.0-10-50-	55.80
	930.0-10-50-	55.80
	930.0-10-75-	62.10
	940.0-10-50-	55.80
	940.0-60-75-	62.10
	950.0-10-50-	55.80
	950.0-65-75-	62.10
	960.0-10-50-	55.80




**Intor, Inc.**  
Designed  
& Manufactured

To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

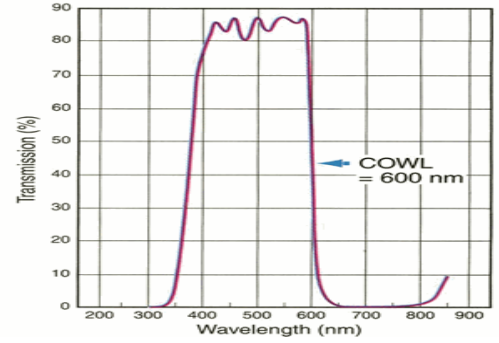

As of: 11/29/2007

Filter Type

Current Price

970.0-10-50-	55.80
980.0-10-50-	55.80
980.0-10-75	62.10
990.0-10-50-	55.80
990.0-10-75	62.10

T18


1000.0-14-50-	22.40
1010.0-14-50-	22.40
1020.0-14-50-	22.40
1030.0-14-50-	22.40
1040.0-15-50-	22.40
1050.0-14-50-	22.40
1064.0-10-75-	22.40
1064.0-16-50-	22.40
400.0-10-33-	22.40
400.0-40-45-	22.40
405.0-10-35-	22.40
410.0-10-43-	22.40
415.0-10-43-	22.40
420.0-10-45-	22.40
430.0-10-45-	22.40
435.8-10-45-	22.40
440.0-10-45-	22.40
450.0-10-45-	22.40
450.0-40-60-	18.80
457.9-10-45-	20.40
460.0-10-45-	20.40
460.0-30-45-	18.80
467.0-10-45-	20.40
470.0-10-45-	20.40
480.0-10-45-	20.40
488.0-10-45-	20.40
488.0-10-70-	18.80
488.0-3-35-	23.60
490.0-10-45-	20.40
500.0-40-70-	18.80
500.0-70-70-	18.80
510.0-10-50-	20.40
514.5-10-50-	20.40
514.5-10-70-	18.80
514.5-3-35-	23.60
520.0-10-50-	20.40
525.0-70-70-	18.80
530.0-10-50-	20.40
532.0-10-50-	20.40
532.0-10-75-	18.80
532.0-3-35-	23.60
532.0-35-75-	18.80



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

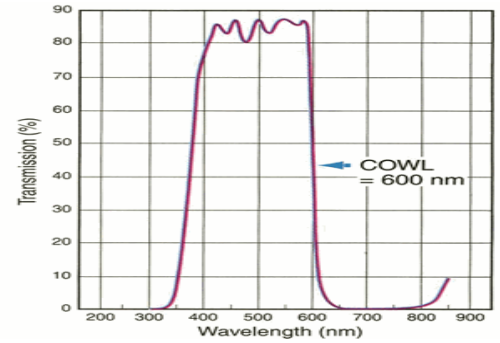

As of: 11/29/2007

Filter Type

Current Price


540.0-10-50	20.40
543.0-10-50-	20.40
546.1-10-50-	20.40
546.1-3-40-	23.60
550.0-10-50-	20.40
550.0-40-75-	18.80
550.0-70-75-	18.80
560.0-10-50-	20.40
565.0-10-50-	20.40
568.2-10-50-	20.40
568.2-3-40-	23.60
570.0-10-50-	20.40
570.0-40-75-	18.80
577.7-10-50-	20.40
577.7-3-40-	23.60
580.0-10-50-	20.40
589.6-10-50-	20.40
589.6-3-40-	23.60
590.0-10-50-	20.40
590.0-40-75-	18.80
600.0-10-50-	20.40
600.0-40-75-	18.80
600.0-65-75-	18.80
610.0-10-50-	20.40
620.0-10-50-	20.40
632.8-10-50-	20.40
632.8-10-75-	18.80
632.8-3-40-	23.60
632.8-40-75-	18.80
636.0-10-50-	20.40
636.0-10-75-	18.80
640.0-10-50-	20.40
647.1-10-50-	20.40
650.0-10-50-	20.40
650.0-40-75-	18.80
650.0-75-75-	18.80
656.3-10-50-	20.40
660.0-10-50-	20.40
660.0-40-75-	18.80
668.0-10-75-	18.80
670.0-10-50-	20.40
670.0-10-75-	18.80
670.0-22-75-	18.80
670.0-30-75-	18.80
670.0-3-40-	23.60
670.0-40-75-	18.80
670.0-75-75-	18.80
671.0-10-50-	20.40



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

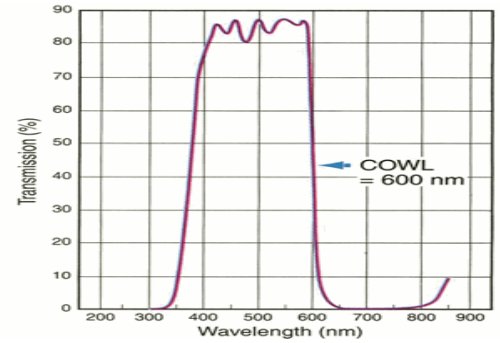


As of: 11/29/2007	Filter Type	Current Price
	675.0-10-75-	18.80
	678.0-22-75-	18.80
	680.0-10-50-	20.40
	685.0-10-75-	18.80
	690.0-10-50-	20.40
	694.3-10-50-	20.40
	700.0-10-50-	20.40
	700.0-40-75-	18.80
	700.0-70-75-	18.80
	710.0-10-50-	20.40
	720.0-10-50-	20.40
	730.0-10-50-	20.40
	730.0-20-75-	18.80
	730.0-30-75-	18.80
	740.0-10-50-	20.40
	750.0-10-50-	20.40
	750.0-40-75-	18.80
	750.0-60-75-	18.80
	760.0-10-50-	20.40
	770.0-10-50-	20.40
	775.0-10-75-	18.80
	780.0-10-50-	20.40
	780.0-10-75-	18.80
	785.0-10-75-	18.80
	790.0-10-50-	20.40
	790.0-60-75-	18.80
	800.0-10-50-	20.40
	800.0-65-75-	18.80
	810.0-10-45-	20.40
	815.0-10-75-	18.80
	820.0-10-45-	20.40
	820.0-10-75-	18.80
	820.0-40-75-	18.80
	820.0-75-75-	18.80
	825.0-10-75-	18.80
	830.0-10-45-	20.40
	830.0-10-75-	18.80
	830.0-40-75-	18.80
	835.0-10-75-	18.80
	840.0-10-45-	20.40
	850.0-10-45-	22.40
	850.0-40-75-	22.40
	850.0-70-75-	22.40
	855.0-10-45-	22.40
	860.0-10-45-	22.40
	870.0-10-45-	22.40
	875.0-10-75-	22.40
	880.0-10-45-	22.40



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

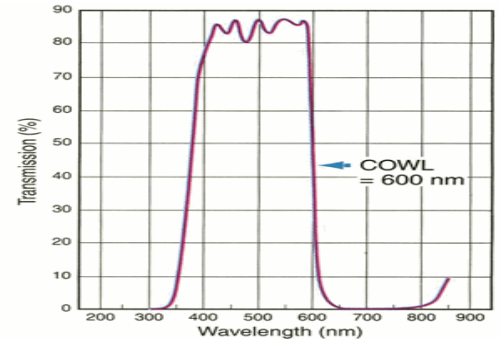


As of: 11/29/2007	Filter Type	Current Price
	880.0-10-75-	22.40
	880.0-50-75-	22.40
	880.0-70-75-	22.40
	885.0-10-75-	22.40
	890.0-10-45-	22.40
	900.0-10-45-	22.40
	900.0-10-75-	22.40
	900.0-20-75-	22.40
	900.0-60-75-	22.40
	905.0-10-50-	22.40
	905.0-10-75-	22.40
	905.0-20-75-	22.40
	905.0-50-75-	22.40
	910.0-10-50-	22.40
	910.0-10-75-	22.40
	910.0-20-75-	22.40
	920.0-10-50-	22.40
	930.0-10-50-	22.40
	940.0-10-50-	22.40
	940.0-60-75-	22.40
	950.0-10-50-	22.40
	950.0-65-75-	22.40
	960.0-10-50-	22.40
	970.0-10-50-	22.40
	980.0-10-50-	22.40
	990.0-10-50-	22.40
<b>T5-A</b>		
	1000.0-14-50-	38.00
	1010.0-14-50-	38.00
	1020.0-14-50-	38.00
	1030.0-14-50-	38.00
	1040.0-15-50-	38.00
	1050.0-14-50-	38.00
	1064.0-10-75-	38.00
	1064.0-16-50-	38.00
	1180.0-11-45-	37.40
	1190.0-11-45-	37.40
	1310.0-32-60-	37.40
	1550.0-45-60-	37.40
	400.0-10-33-	36.80
	400.0-40-45-	36.80
	405.0-10-35-	36.80
	410.0-10-43-	36.80
	415.0-10-43-	36.80
	420.0-10-45-	36.80
	430.0-10-45-	36.80
	435.8-10-45-	36.80
	440.0-10-45-	36.80



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

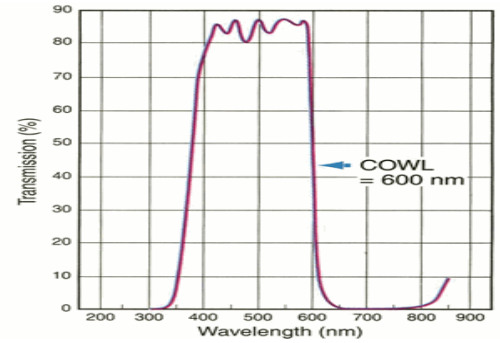

As of: 11/29/2007

Filter Type

Current Price


450.0-10-45-	36.80
450.0-40-60-	38.50
457.9-10-45-	33.90
460.0-10-45-	33.90
460.0-30-45-	38.50
467.0-10-45-	33.90
470.0-10-45-	33.90
480.0-10-45-	33.90
488.0-10-45-	33.90
488.0-10-70-	36.80
488.0-3-35-	38.50
490.0-10-45-	33.90
500.0-40-70-	36.80
500.0-70-70-	36.80
510.0-10-50-	33.90
514.5-10-50-	33.90
514.5-10-70-	36.80
514.5-3-35-	38.50
520.0-10-50-	33.90
525.0-70-70-	36.80
530.0-10-50-	33.90
532.0-10-50-	33.90
532.0-10-75-	36.80
532.0-3-35-	38.50
532.0-35-75-	36.80
535.0-50-75-	37.40
540.0-10-50	33.90
543.0-10-50-	33.90
546.1-10-50-	33.90
546.1-3-40-	38.50
550.0-10-50-	33.90
550.0-40-75-	36.80
550.0-70-75-	36.80
560.0-10-50-	33.90
560.0-10-75-	37.40
565.0-10-50-	33.90
568.2-10-50-	33.90
568.2-3-40-	38.50
570.0-10-50-	33.90
570.0-40-75-	36.80
577.7-10-50-	33.90
577.7-3-40-	38.50
580.0-10-50-	33.90
589.6-10-50-	33.90
589.6-3-40-	38.50
590.0-10-50-	33.90
590.0-40-75-	36.80
600.0-10-50-	33.90



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

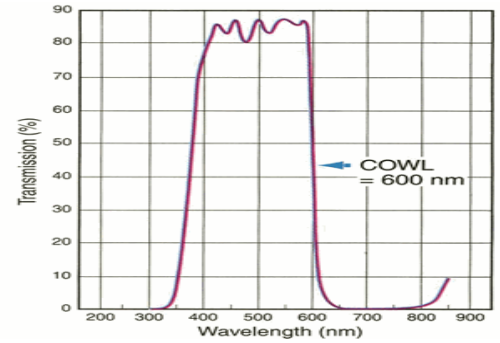


As of: 11/29/2007	Filter Type	Current Price
	600.0-40-75-	36.80
	600.0-65-75-	36.80
	610.0-10-50-	33.90
	620.0-10-50-	33.90
	632.8-10-50-	33.90
	632.8-10-75-	36.80
	632.8-3-40-	38.50
	632.8-40-75-	36.80
	636.0-10-50-	33.90
	636.0-10-75-	36.80
	640.0-10-50-	33.90
	647.1-10-50-	33.90
	650.0-10-50-	33.90
	650.0-40-75-	36.80
	650.0-75-75-	36.80
	656.3-10-50-	33.90
	660.0-10-50-	33.90
	660.0-40-75-	36.80
	668.0-10-75-	36.80
	670.0-10-50-	33.90
	670.0-10-75-	36.80
	670.0-22-75-	36.80
	670.0-30-75-	36.80
	670.0-3-40-	38.50
	670.0-40-75-	36.80
	670.0-75-75-	36.80
	671.0-10-50-	33.90
	675.0-10-75-	36.80
	678.0-22-75-	36.80
	680.0-10-50-	33.90
	685.0-10-75-	36.80
	690.0-10-50-	33.90
	694.3-10-50-	33.90
	700.0-10-50-	33.90
	700.0-40-75-	36.80
	700.0-70-75-	36.80
	710.0-10-50-	33.90
	720.0-10-50-	33.90
	730.0-10-50-	33.90
	730.0-20-75-	36.80
	730.0-30-75-	36.80
	740.0-10-50-	33.90
	750.0-10-50-	33.90
	750.0-40-75-	36.80
	750.0-60-75-	36.80
	760.0-10-50-	33.90
	770.0-10-50-	33.90
	775.0-10-75-	36.80



To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA}\pm 2.0$  nm. FWHM:  $\text{\AA}\pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

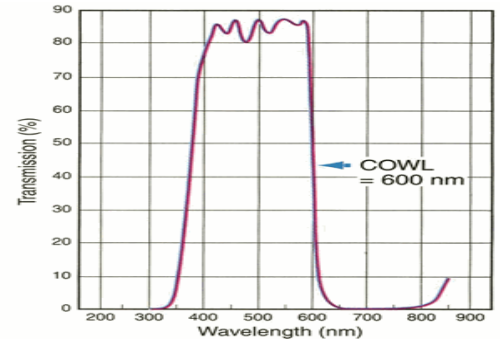

As of: 11/29/2007

Filter Type

Current Price

780.0-10-50-	33.90
780.0-10-75-	36.80
785.0-10-50-	33.90
785.0-10-75-	36.80
790.0-10-50-	33.90
790.0-60-75-	36.80
800.0-10-50-	33.90
800.0-15-50-	37.40
800.0-35-75-	37.40
800.0-65-75-	36.80
805.0-35-75-	37.40
810.0-10-45-	33.90
815.0-10-75-	36.80
820.0-10-45-	33.90
820.0-10-75-	36.80
820.0-40-75-	36.80
820.0-75-75-	36.80
825.0-10-75-	36.80
830.0-10-45-	33.90
830.0-10-75-	36.80
830.0-40-75-	36.80
835.0-10-75-	36.80
840.0-10-45-	33.90
850.0-10-45-	38.00
850.0-40-75-	38.00
850.0-70-75-	38.00
855.0-10-45-	38.00
860.0-10-45-	38.00
870.0-10-45-	38.00
875.0-10-75-	38.00
880.0-10-45-	38.00
880.0-10-75-	38.00
880.0-50-75-	38.00
880.0-70-75-	38.00
885.0-10-75-	38.00
890.0-10-45-	38.00
900.0-10-45-	38.00
900.0-10-75-	38.00
900.0-20-75-	38.00
900.0-60-75-	38.00
905.0-10-50-	38.00
905.0-10-75-	38.00
905.0-20-75-	38.00
905.0-50-75-	38.00
910.0-10-50-	38.00
910.0-10-75-	38.00
910.0-20-75-	38.00
920.0-10-50-	38.00




**Intor, Inc.**  
 Designed  
 & Manufactured

To order today visit <http://www.Intor.com>

Phone: (575) 835-2200 Toll-free: (800) 984-9814 Fax: (575) 835-2004

Standard UV and visible filters 340.0 nm through 1090.0 nm. Transmission: Per stock list. CWL:  $\text{\AA} \pm 2.0$  nm. FWHM:  $\text{\AA} \pm 2.0$  nm. Off band rejection: 4.0 O.D. (10-4 T) absolute from 200.0 nm through 3500+ nm. Cavities: 3 minimum.

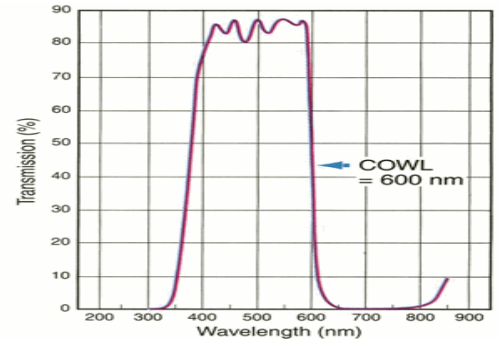

As of: 11/29/2007

Filter Type

Current Price

Filter Type	Current Price
930.0-10-50-	38.00
940.0-10-50-	38.00
940.0-60-75-	38.00
950.0-10-50-	38.00
950.0-65-75-	38.00
960.0-10-50-	38.00
970.0-10-50-	38.00
980.0-10-50-	38.00
990.0-10-50-	38.00